

EPSON[®]
EXCEED YOUR VISION

PowerLite[®] 825

Multimedia Projector



Remarkable brightness and audio. Enhanced connectivity and optional wireless performance.

- **Ultra bright, brilliant presentations** — 3000 lumens color light output, 3000 lumens white light output*
- **Razor-sharp detail** — native XGA resolution
- **Convenient network accessibility** — display images and presentations over the IP network from any networked location
- **Powerful sound and communication features, no added cost** — built-in 10 W speaker, closed captioning decoder
- **Convenient microphone input** — saves both money and the presenter's voice by using the projector's speaker
- **Energy-efficient E-TORL[®] lamp** — up to 6000-hour lamp life**
- Plug 'n Play, no-hassle setup — instantly projects images from a PC via the USB connection
- **Message broadcasting** — broadcasts customized images/alerts over the network for announcements or instructions†
- **Easy network monitoring and control** — RJ-45 connectivity and included software
- **Easy picture adjustments and greater positioning flexibility** — automatic keystone correction, 1.6x optical zoom
- **Quick, convenient control** — direct power on/off, AV Mute/Sleep Mode, Instant Off[®]/On
- **Wireless capabilities** — via the optional wireless module and included software or optional Quick Wireless Connection USB key
- **PC-free JPEG slideshows** — via the USB thumb drive port
- Rich, vibrant color and reliable performance — 3LCD, 3-chip optical engine
- **Filters to protect your investment** — with easy side access for hassle-free maintenance
- **Added security in any environment** — convenient metal anchor bar
- **Carrying case included** — for easy portability and protection when stored



www.duocom.ca 1-888-338-6266

duocom Canada's Leader in Audio Visual Solutions

PowerLite 825

Multimedia Projector

ORDERING INFORMATION


Product Name	Product Code	UPC
PowerLite 825	V11H297020	010343 87306 3
Replacement Lamp	V13H010L50	010343 87322 3
Replacement Air Filter Set	V13H134A22	010343 87323 0

SPECIFICATIONS

Projection System
 Epson 3LCD, 3-chip optical engine
Projection Method
 Front/rear/ceiling mount
Driving Method
 Epson Poly-silicon TFT Active Matrix
Pixel Number
 786,432 dots (1024 x 768) x 3
White Light Output*
 3000 lumens (ISO 21118 Standard)
Color Light Output*
 3000 lumens
Aspect Ratio
 4:3
Native Resolution
 1024 x 768 (XGA)
Resize
 640 x 480 (VGA), 800 x 600 (SVGA),
 1152 x 864 (SXGA), 1280 x 800 (WXGA),
 1440 x 900 (WSXGA), 1400 x 1050 (SXGA+),
 1600 x 1200 (UXGA)
Lamp Type
 E-TORL 200 W UHE
Lamp Life**
 Up to 6000 hours (Low Light Output Mode)
 Up to 5000 hours (High Light Output Mode)
Throw Ratio Range
 1.39 – 2.26 (4:3)
Size (projected distance)
 30" – 300" (2.7' – 45.5')
Keystone Correction Automatic
 Vertical: ± 30 degrees
Plug 'n Play
 Projector is Mac® compatible via DVI to VGA
 adapter (not included)
Contrast Ratio
 Up to 2000:1
Color Reproduction
 16.77 million colours

PROJECTION LENS

Type
 Manual focus/(optical) zoom
F-number
 1.49 – 1.94
Focal Length
 18.2 mm – 29.2 mm
Zoom Ratio
 Optical zoom 1.0 – 1.6
OTHER
Display Performance
 NTSC: 480 lines
 PAL: 560 lines
 (Depends on observation of the multi-burst
 pattern)
Input Signal
 NTSC/NTSC4.43/PAL/M-PAL/N-PAL/PAL60/
 SECAM
Interfaces
 Computer/component video: D-sub 15 pin x 2
 S-video: Mini DIN x 1
 Composite video: RCA x 1
 Audio in x 3 (RCA (L&R) x 1, mini stereo x 2)
 Variable Audio Out: mini stereo x 1
 USB connector: Type B x 1 (USB display and
 mouse/keyboard control), Type A x 1 (for USB
 memory device)
 Serial: RS-232C x 1
 LAN Networking: RJ-45 x 1
 Monitor Out: Mini D-sub 15 pin x1
 Microphone: stereo mini jack x 1
 Wireless LAN port: 802.11 a/b/g (optional —
 module sold separately)
Speaker
 10 W (mono)
Operating Temperature
 41° to 95° F (5° to 35° C)
Power Supply Voltage
 100 – 240 V ±10%, 50/60 Hz
Power Consumption
 289 W
 Communication on: 7.9 W standby
 Communication off: 1.9 W standby

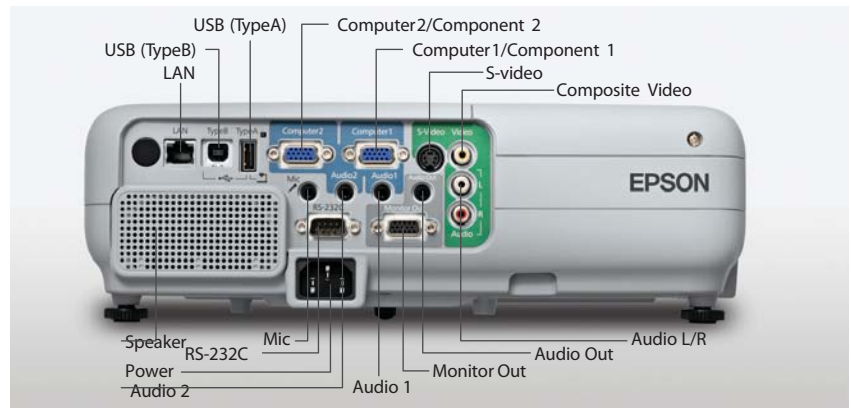

Fan Noise
 35 dB (High Light Output Mode)
 28 dB (Low Light Output Mode)
Security
 Kensington®-style lock provision, security
 anchor bar
DIMENSIONS (W x D x H)
 Including feet: 12.9" x 9.8" x 4.3"
 Excluding feet: 12.9" x 9.8" x 3.7"
 Weight: 7.0 lb/3.1 kg

REMOTE CONTROL

Features
 Search, Comp, Video, USB, LAN, power,
 aspect, color mode, volume, e-zoom, A/V mute,
 freeze, menu, page up and down, help, auto,
 mouse functions, user, num, pointer, esc, enter
Operating Angle
 Right/left: ± 30 degrees
 Upper/lower: ± 30 degrees
Operating Distance
 19' (6 m)

SUPPORT — THE EPSON CONNECTION™

Pre-sales Support
 U.S. and Canada 800-463-7766
 Internet website www.epson.com

Service Programs
 Two-year projector limited warranty, Epson
 Road Service program, Epson PrivateLine™
 dedicated toll-free support and 90-day lamp
 limited warranty

What's In The Box
 Power cord, computer cable (VGA), USB
 cable, soft carrying case, projector remote
 control, batteries, user manual CD, Projector
 Software CD, Quick Setup Sheet, PrivateLine
 support card, registration card and password
 protection sticker

ACCESSORY PART NUMBERS

Wireless LAN module (ELPAP03) V12H306P11
 Quick Wireless Connection
 USB Key (ELPAP05) V12H005M05
 Universal projector ceiling mount ELPMBPJF
 Advanced projector ceiling mount ELPMBPRG

High Security projector
 ceiling mount ELPMBATA
 Adjustable suspended ceiling
 channel kit ELPMBP01
 False ceiling plate kit ELPMBP02
 Structural Round ceiling plate
 Adjustable Extension Column
 (pipe) 8" – 11" ELPMBP03
 Component to VGA video cable
 S-video cable ELPMBP04
 SwissGear® backpack ELPKS63
 Wheeled soft case ELPKS62
 Soft shoulder case for
 projector and laptop ELPKS61
 Molded hardshell case ELPKS58
 50" portable screen ELPSC06
 60" portable pop-up screen ELPSC07
 80" portable pop-up screen ELPSC08
 Duet™ screen ELPSC80
 Epson DC-10s document camera
 Epson DC-06 document camera
 (ELPDC06) V12H321001
 Kensington security lock ELPKSL01
 Distribution amplifier ELPDA01
 Image presentation camera
 (ELPDC05) V12H162020

PACKAGING SPECIFICATIONS

PowerLite 825
Dimensions 16.3" x 14.6" x 7.2" (W x D x H)
Weight 12.8 lb

Replacement Lamp
Dimensions 6.3" x 5.6" x 5.6" (W x D x H)
Weight 0.7 lb
Master Carton
Dimensions 28.4" x 13.1" x 6.8" (W x D x H)
Weight 8.6 lb
Units Per Master Carton 10

Replacement Air Filter Set
Dimensions 4.9" x 3.9" x 1.2" (W x D x H)
Weight 0.02 lb
Master Carton
Dimensions 12.8" x 5.3" x 4.7" (W x D x H)
Weight 0.2 lb
Units Per Master Carton 10

* Light output varies depending on modes (color and white light output).

** Lamp life results will vary depending upon mode selected, environmental conditions and usage. Lamp brightness decreases over time.

† Plug-in available at www.epson.com

Better Products for a Better Future™

www.epson.com/environment

Epson America, Inc.
 3840 Kilroy Airport Way, Long Beach, CA 90806

Epson Canada, Ltd.
 3771 Victoria Park Avenue, Toronto, Ontario M1W 3Z5

Specifications and terms are subject to change without notice. Epson, Instant Off and E-TORL are registered trademarks, Epson Exceed Your Vision is a registered logomark and Better Products for a Better Future is a trademark of Seiko Epson Corporation. PowerLite and PrivateLine are registered trademarks, Duet is a trademark and Epson Connection is a service mark of Epson America, Inc. All other product and brand names are trademarks and/or registered trademarks of their respective companies. Epson disclaims any and all rights in these marks. Copyright 2009 Epson America, Inc. CPD-26973R1 4/09 PDF